BRUHAT BANGALORE MAHANAGARA PALIKE
DASARAHALLI ZONE

Name of Work: Improvements to Main roads and Cross Roads at Manjunatha nagara ward No:14 in Bagalagunte

			Est. Cost Rs				50.00	Lakhs	
Sl	Description of Item	Unit	No	L	B	D	Qty	Rate	Amount
1	KSRRB 300 - Excavation for road, drains and similar works - KSRRB 300-1. Earthwork excavation by manual means in Ordinary soil involving an average horizontal throw upto 2 meters and an average lift upto 0.5 m, excavated surface leveled and sides neatly dressed, the disposed earth to be leveled neatly after breaking of clods complete as per specifications complete as per specifications. MORTH Chapter 3 (P.141/I.19.1 PW, P & IWTD -SR 2015-16)								
			1	231.00	0.45	0.45	46.78		
							46.78	83.16	3890.00
	Basic Rate	77.00							
	Add Area Weightage 8%	6.16							
	Total	83.16							
2	KSRRB 300-47. Scarifying kankar / gravel / metal crust upto 150mm thick with pick axes and disposal of stuff including cost of all labour charges Complete as per specifications. MORTH Chapter 3. Page No. 146/ Item No. 19.53/ PWD SR 2015-16								
		Sqm	1	800.00	5.50		4400.00		
	Basic Rate	24.00					4400.00	25.92	114048.00
	Add Area Weightage 8%	1.92							
	Total	25.92							
3	Removing B.S.Slab of drain and stacking etc., complete Page No. 25/ Item No. 5.32/ PWD SR 2015-16								
		Sqm	1	231.00	1.35		311.85		
		Consider 60% Qty					187.11		
	Basic Rate	59.00					124.74	63.72	7948.00
	Add Area Weightage 8%	4.72							
	Total	63.72							
4	KSRB 4-1.3: Providing and laying in position **plain cement concrete of mix 1:4:8** with OPC cement @180 kgs, with 40mm and down size graded granite metal coarse aggregates @0.85cum and fine aggregates @0.57cum machine mixed, concrete laid in layers not exceeding 15 cms. thick, well compacted, in foundation and plinth, including cost of all materials, labour, HOM of machinery, curing complete as per specifications. Specification No. KBS 4.1, 4.2 (P.12/I.4.3) PWD - SR 2015-16)								
			2	231.00	0.30	0.15	20.79		
	Basic Rate	4695.00					20.79	5070.60	105418.00
	Add Area Weightage 8%	375.60							
	Total	5070.60							

Sl	Description of Item	Unit	No	L	B	D	Qty	Rate	Amount
5	KSRB 4-1.7 : Providing and laying in position plain cement concrete of mix 1:3:6 with OPC Cement @220 kgs with 20 mm and down size graded granite metal course aggregates @ 0.84 cum and fine aggregates @0.56 cum machine mixed, concrete laid in layers not exceeding 15 cms thick, well comated, in foundation and plinth, including cost of all materials, labour, HOM of machinery, curing complete as per , Specification NO KBS 4.1,4.2 Page No 13/ Item No 4.7/PWD SR 2015-16								
		Sqm	1	231.00	0.20	0.10	4.62		
	Basic Rate	5085.00					4.62	5491.80	25372.00
	Add Area Weightage 8%	406.80							
	Total	5491.80							
6	Refixing stone slabs of drains and pointing in CM 1:3 etc complete Page No. 25/ Item No.5.33/ PWD SR 2015-16								
		Sqm	Qty Vide Iteam No 2				187.11	78.84	14752.00
	Basic Rate	73.00							
	Add Area Weightage 8%	5.84							
	Total	78.84							
7	Providing Granite slabs selected quality roughly dressed and fixed in cement mortar (1:6) including fixing curing etc., complete 7.5 thick (P. 25 I. 5.31.1) Page No. 25/ Item No. 5.31.1/ PWD SR 2015-16								
		Sqm	Qty vied Item No 02				311.85		
		Deduct Availabe Qty Vide Iteam No 2					187.11		
	Basic Rate	614.00					124.74	663.12	82718.00
	Add Area Weightage 8%	49.12							
	Total	663.12							
8	KSRB 5-14 : Providing and constructing precast concrete solid blocks with compressive strength not les than 35 Kg/sqm with cement mortar 1:4 masonry (quoin, Jamb, closer blocks) with solid concrete blocks of size 40x20x20 cms conforming to I.S: 2185/1965 in superstructure including cost of materials, labour charges, scaffolding, curing complete as per specifications. Page No. 25/ Item No. 5.27/ PWD SR 2015-16								
		Sqm	2	231.00	0.60		277.20		
	Basic Rate	943.00					277.20	1018.44	282312.00
	Add Area Weightage 8%	75.44							
	Total	1018.44							
9	Supplying and fixing precast rainforced concee slab 10cm thick including cost of reinforcement as per design and drawing material cost, transportation, hire charges of machinery, machine cutting the vertical face to get plain even surface stc., complete with all leads and lift conveyance charges, labour charges inclusive of cost of all materials.								
			1	231.00	0.90		207.90		
	Data Rates Approved						207.90	1600.00	332640.00

Sl	Description of Item	Unit	No	L	B	D	Qty	Rate	Amount
10	Providing, laying, spreading and compacting graded stone aggregates to **wet mix macadam** specifications including pre mixing the material with water at OMC in mechanical mix plant carriage of mixed method of tipper to site, laying in uniform layers with paver in sub-base / base course on well prepared surface and compacting with vibratory roller to achieve the desired density complete as per specifications. Specification No. 406 with all leads and lifts etc., complete as per the direction of Engineer-in-charge of the work.(PWD SR 2015-16, P.No.154, I No.20.18)								
	Roads	Cum.	1	800.00	5.50	0.25	1100.00	1713.96	1885356.00
	Basic Rate	1587.00							
	Add Area Weightage 8%	126.96							
	Total	1713.96							
11	Providing and applying **primer coat** with S.S. Bitumen emulsion on prepared surface of granular base such as WBM, WMM including clearing of road surface and spraying primer at the rate of 0.6 kg / sqm using mechanical means complete as per specifications, with all leads and lifts etc., complete as per the direction of Engineer-in-charge of the work.(PWDSR 2015-16, P.No.157, I No.21.6)								
		Sqm	1	800.00	5.50		4400.00		
							4400.00	32.40	142560.00
	Basic Rate	30.00							
	Add Area Weightage 8%	2.40							
	Total	32.40							
12	Providing and laying **bituminous concrete** with hot mix plant using crushed aggregates of specified grading, premixed with bituminous binder and filter transporting the hot mix to work site laying with paver finisher to the required grade, level and alignment. rolling with smooth wheeled vibratory and tandem rollers to achieve the desired compaction as per MORTH Speicification clause no 500.9 complete in all respects complete as per specification no 509. using 40/60 TPH Capacity H.M.P With Mechanical paver Gr-II (30 mm to 45 mm) with 6% VG-30 Bitumen (p-164, lt 21.22.6) PWD SR 2015-16								
		Cum	1	800.00	5.50	0.045	198.00		
	Basic Rate	9095.00					**198.00**	9822.60	1944875.00
	Add Area Weightage 8%	727.60							
	Total	9822.60							
13	Disposal of debris to the final place of disposal with all lead and lift and as direction by the engineer in charge of the work, lead 4 Km a) Basic rate for haulage of materials as per item No. 17.4/KSRRB : M100-4.1 ..... Rs. 2.00 Tonne/Km b) Average earth of work 1.28 Tonne/Km for Rs. 2.00/Km c) Add loading and unloading Page No. 133 Item No. 17.1 PWD SR 2015-16								

Sl	Description of Item	Unit	No	L	B	D	Qty	Rate	Amount
		Cum		Qty Vide Item No. 1			46.78	84.50	3953.00
	Loading and Unloading	68.00							
	Lead 4 KMs	10.24							
		78.24							
	Area Weightage @ 8%	6.26							
	Total	84.50							
14	Quality control Test Charges 1%								50000.00
15	Miscellaneous and UnforessenCharges								4158.00
								Total	5000000.00

(Rupees.Fifty Lakhs Only)

CERTIFICATE:-

1 The Work spot has been inspected and the work is found to be necessary
2 The Estimate is prepared as per the PW,P & IWTD -SR-2015-16
3 The Provision made in estimate are adequate and essential.
4 This area comes under BBMP limits.

Assistant Engineer
Ward-14

Assistant Executive Engineer
T. Dasarahalli Sub-Division
B.B.M.P

Executive Engineer
Dasarahalli Division
B.B.M.P. Bangalore.

A/S

ನಂ. AC(DH) AS/05/16-17 ದಿನಾಂಕ : 18/05/2016
ರೂ. 50.00 Lakhs (Rupees fifty Lakhs only)
ಗಳ ಅಂದಾಜು ಪಟ್ಟಿಗೆ ಆಡಳಿತಾತ್ಮಕ ಮಂಜೂರಾತಿ ನೀಡಿದೆ
Page No-34
SL.No.05
ಅಪರ ಆಯುಕ್ತರು
ಬೃಹತ್ ಬೆಂಗಳೂರು ಮಹಾನಗರ ಪಾಲಿಕೆ
ದಾಸರಹಳ್ಳಿ ವಲಯ, ಬೆಂಗಳೂರು

ನಂ. CE(D2)/PR 29/16-17 ದಿನಾಂಕ : 25-05-2016
Pg:116
ರೂ. Rs 50.00 Lakhs (Rupees fifty Lakhs only)
ಗಳ ಅಯವ್ಯಯ ಪಟ್ಟಿಗೆ ತಾಂತ್ರಿಕ ಮಂಜೂರಾತಿ ನೀಡಿದೆ.
ಮುಖ್ಯ ಅಭಿಯಂತರರು
ತಾಂತ್ರಿಕ ಸಹಾಯಕರು ಬಿ.ಬಿ.ಎಂ.ಪಿ.
ದಾಸರಹಳ್ಳಿ ವಲಯ, ಬೆಂಗಳೂರು.

Name of work :- Improvements to main roads and cross roads at Manjunatha nagara Ward No 14. Bagalagunte

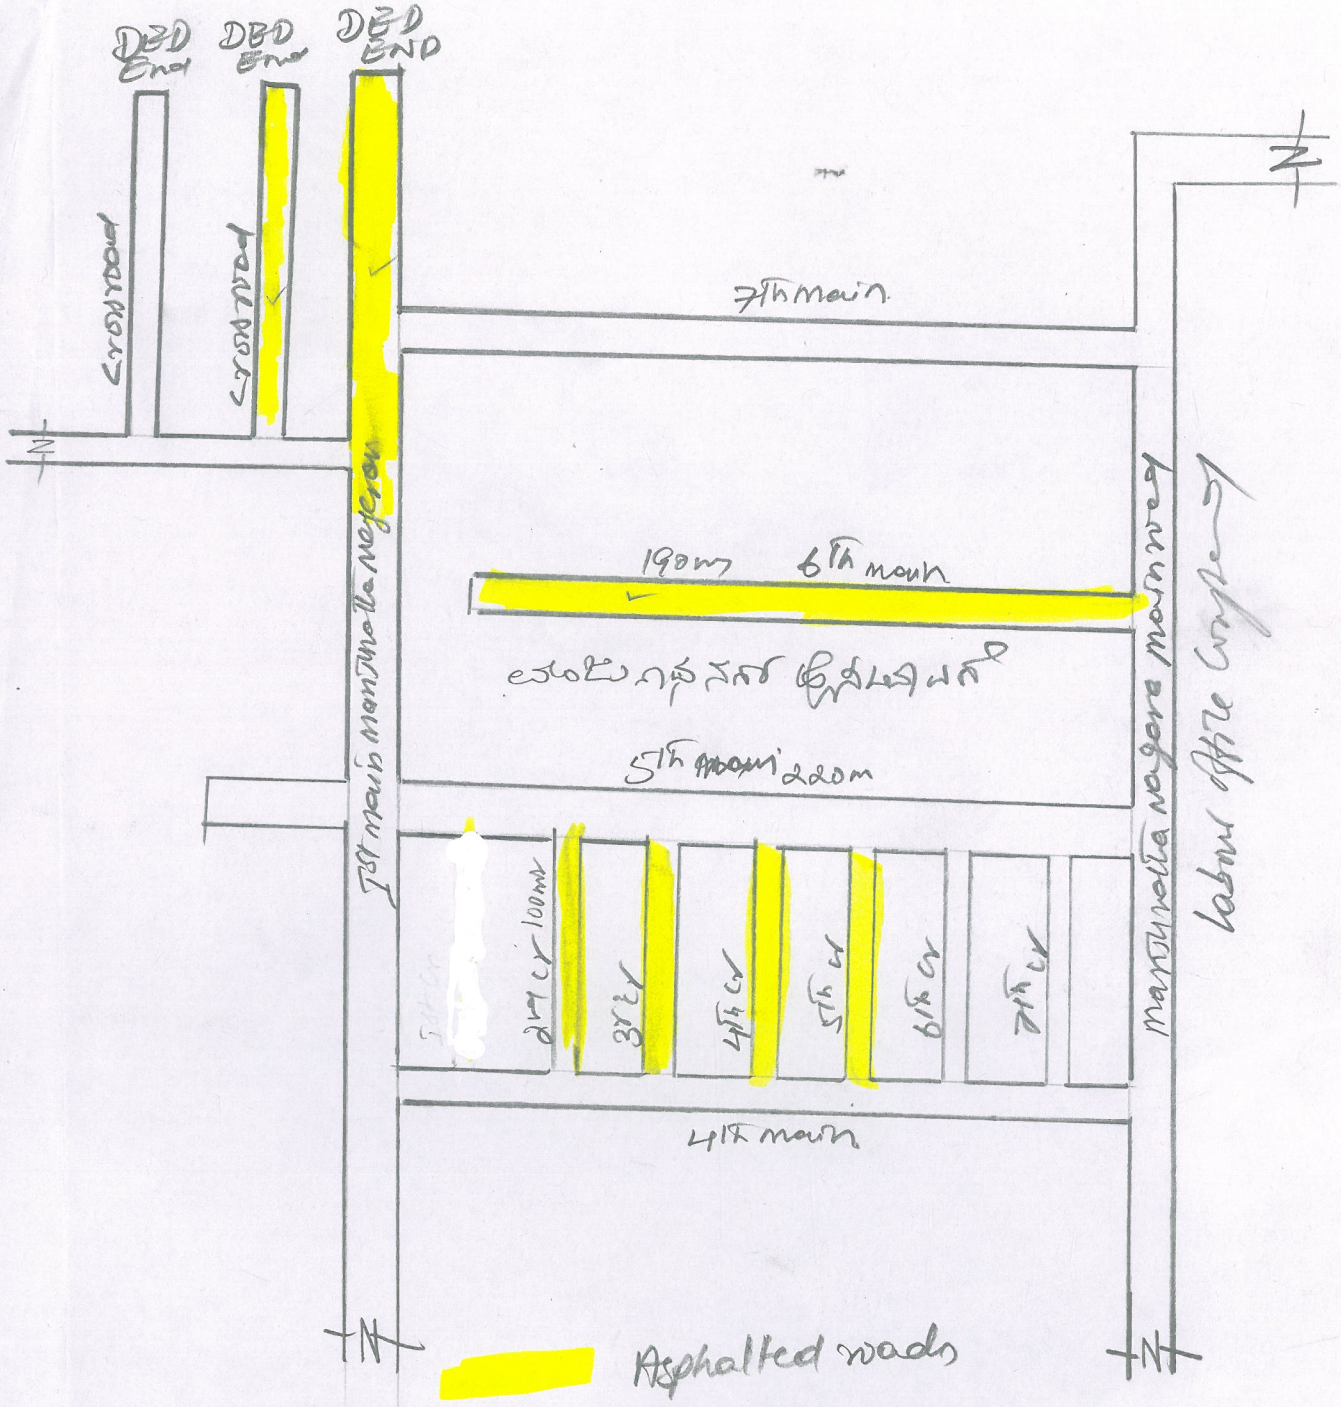

ಸಹಾಯಕ ಕಾರ್ಯ ಪಾಲಕ ಅಭಿಯಂತರರು
ಬಿ.ಡಬ್ಲ್ಯೂ.ಎಸ್.ಎಸ್.ಬಿ ಉಪ-ವಿಭಾಗ
ಬಾಗಲಗುಂಟೆ, ಬೆಂಗಳೂರು